

ERESCO 65 MF4

300

ERESCO 65 MF4 -

IP65

5-300

65

Eresco

42 MF4,
100 MF4PR, 100 MF4PRW, 200 MR4PR,
32 MF4-C, 42 MF4-W, 280 MF4-8,
65 MF5, 65 MF5-W;
200 MF5PRW, 52 MR5PCL.

65

-
-
-
-
-
- \
-
-
-
- 100%
-
-
-
- NFC 74 100 compliant
- BFS [(PTB)
- - n IP65
- \

Comet

100%
(86 ° F)

30 °

300
40° x 60°

30 ° (80 ° F)

NFC 74 100 compliant

(PTB)





n IP65



E

	300	-	(W)
	5 - 300		
	20°		
	0.8 mm ± 0.1 mm, Be		
	40° x 60°		
	3,0 (EN 12543) 1,5 (IEC 336)		
	0.5 - 6 A (3.0 A / 300 kV)		
Max	100 °C		
	±1%		
O	900 W		
Power input, max.	2.0 kVA		
	40 (88.2 lbs)		
	37.5 (82.7 lbs) (1 2)		
1	290 (11.42")		
	225 (7.87") (1 2)		
O	IP65		
	-20°C to +50°C		
	-30°C to +80°C		

-
-
-
-
-
-
-

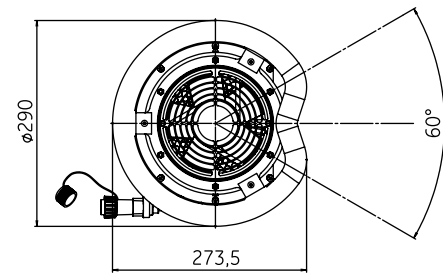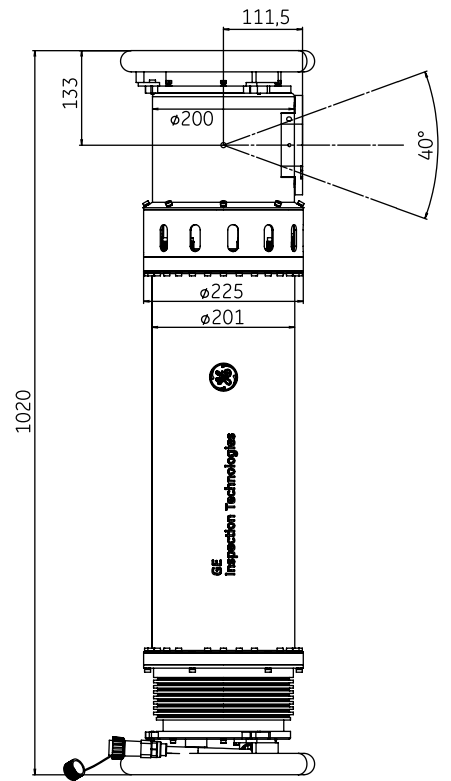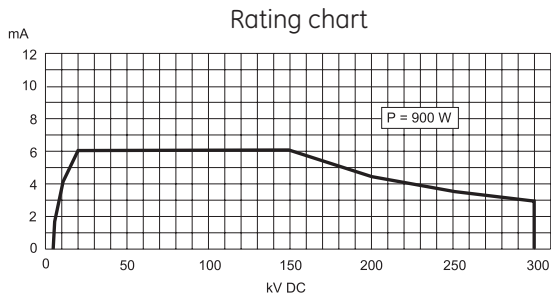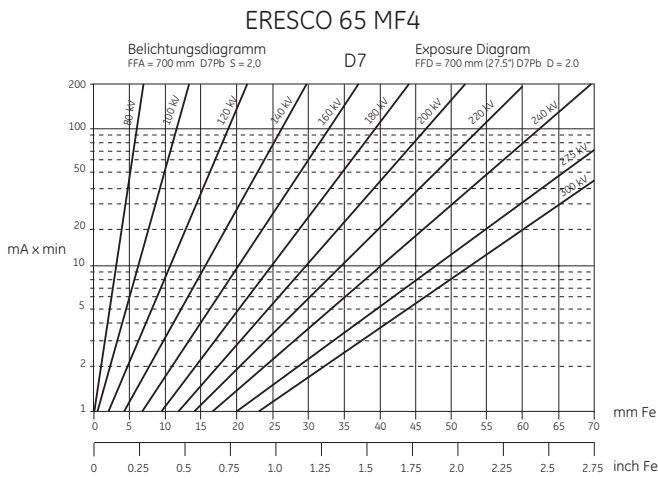

drawings not true to scale

